


# User manual for Ksix LED Alarm Clock with Qi Wireless Charger and Night Lamp



## Specifications

- Input: DC 5V/2A, 9V/1.67A
- Input connector: USB-C
- Qi wireless charging output: 5W, 7.5W, 10W
- USB output: DC 5V/1A
- Charging distance: up to 8mm
- Charging efficiency: up to 73%
- Dimensions: 140mm x 100mm x 75mm
- Weight: 150g

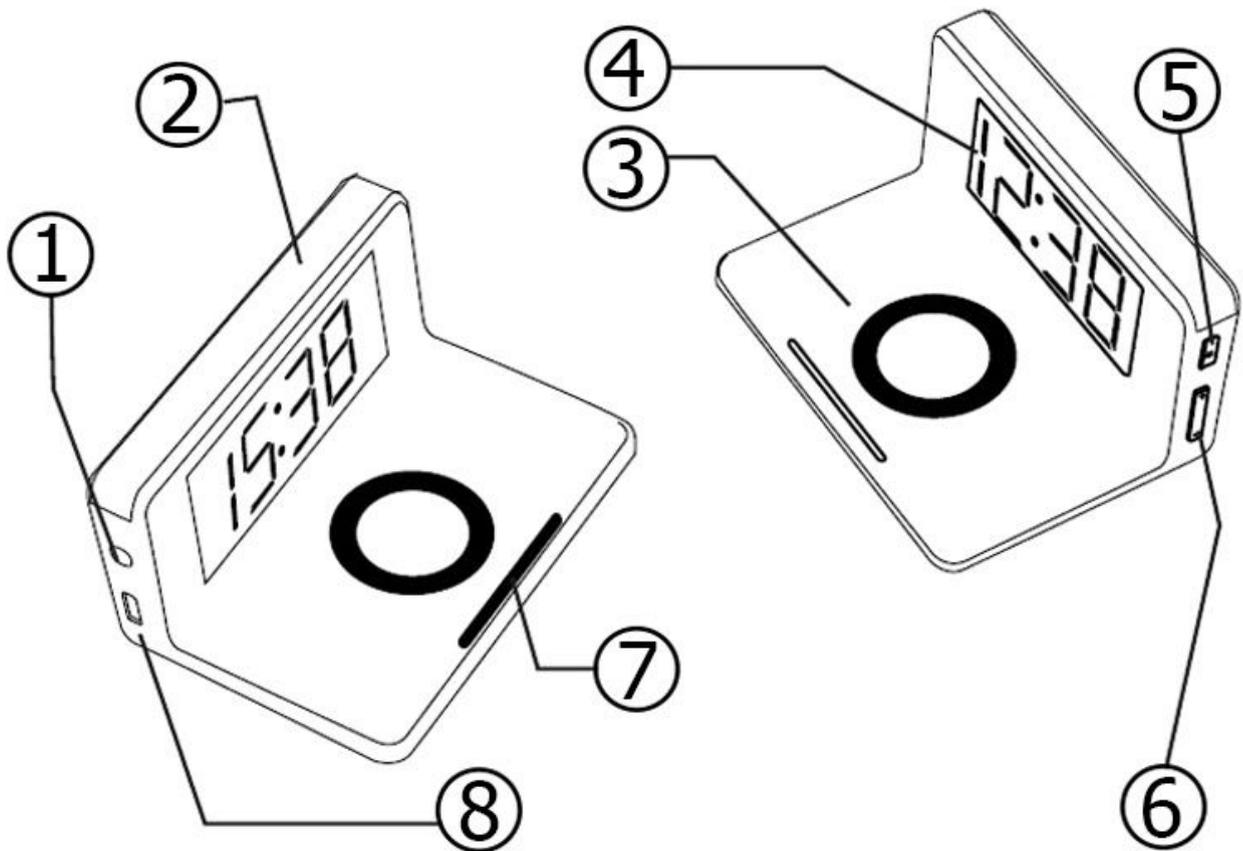

- |                            |                              |
|----------------------------|------------------------------|
| 1. LED light on/off button | 5. Multifunctional button    |
| 2. LED light               | 6. + and - selection buttons |
| 3. Wireless charging       | 7. Second indicator          |
| 4. Hours and minutes       | 8. USB output                |

## **Using the Fast Charge wireless charge**

1. Connect the wireless charger to a power source using the included USB A to USB C cable. The USB C end must be plugged into the USB C input port of the charger. If you wish to use fast charging power, plug the wireless charger into a power source with a Qualcomm QuickCharge 2.0 charger or higher (not provided with the product) or into a USB 2A charger or higher for the iPhone 8, iPhone 8 Plus, iPhone X or upgraded model.

2. The LED hour and minute indicators will light up. The LED indicator located on the charger's surface will blink blue slowly twice, and then turn off. This means that the charger is ready to supply energy to devices equipped with wireless charging.

3. To charge a device equipped with wireless charging technology\*, place it in the center of the charger on the surface indicated by the nonslip circle. The LED indicator will turn blue. This means that the wireless charger is delivering energy. The battery icon on your mobile phone will show that it is charging.

4. Once the device is fully charged, the LED indicator will turn off.

\*If your device does not support wireless charging technology, the LED indicator will blink blue quickly.

**Note:** Please keep in mind that the iPhone 8, iPhone 8 Plus, iPhone X or upgraded models may overheat during charging. If your device becomes too hot, it is possible that the software limits battery charging to 80%. Restart charging with the iPhone and the charger located in a cooler place.

## **Charging a device using a cable with a USB plug**

With the built-in USB output, the Fast Charge Wireless Charger with Alarm Clock lets you charge devices not designed for wireless charging. To do so, you will need to have a USB A - USB C/Micro USB/other (depending on the input port of the device you wish to charge), not included. The charging speed will be standard.

1. Connect the wireless charger to a power source using the USB A - USB C cable that is included. The USB C plug must be plugged into the input port of the USB C input on the charger.

2. Connect your mobile device to the wireless charger using a USB A - USB C/Micro USB/another cable (depending on the type of input port the device you want to charge has), which is not included.

## **Using the alarm clock**

### Setting the hour and minute

1. Press the multifunction button once. The minute indicator will start to blink. Set the minutes using the + and - selection buttons.
2. To set the hour, press the multifunction button again. The hour indicator will start to blink. Set the hour using the selection buttons.
3. Press the multifunction button again to exit configuration mode.

## **Setting the intensity of the LED indicators**

Use the + and - buttons to set the intensity of the LED hour and minute indicators on one of three possible levels. At 08:00 the clock's LED indicators will automatically be set to maximum intensity. At 20:00 they will automatically be set to minimum intensity.

## **Set an alarm**

1. Press and hold the multifunction button for 3 seconds. The minute indicator will start to blink. Select the minute when you would like the alarm to go off using the + and - selection buttons.
2. To set the hour when the alarm should go off, press the multifunction button again. The hour indicator will start to blink. Set the hour using the + and - selection buttons.
3. Press the multifunction button once more to exit the alarm configuration mode.
4. Press and hold the + button for three seconds to turn the alarm on so that it goes off at the set time. You will see that the LED alarm indicator will turn on. If you wish to turn the alarm off, press and hold the - button for three seconds.
5. When the alarm goes off, lightly tap the alarm charger twice in a row on the LED light to activate snooze mode. The alarm will go off again 5 minutes later. You can activate snooze mode twice.
6. If you want to turn the alarm off while it is going off, press and hold the - button for 3 seconds.

When the alarm goes off, lightly tap the alarm charger twice in a row on the LED light to turn it off. You can also turn the alarm off by pressing the - button for 3 seconds.

## **Using the LED light**

Use the LED light's on/off button to turn it on and off. Once the light is on, press the button to select one of the three possible light intensities.