

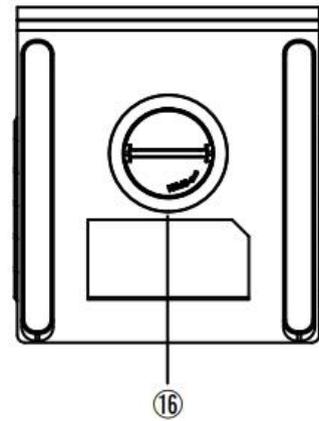
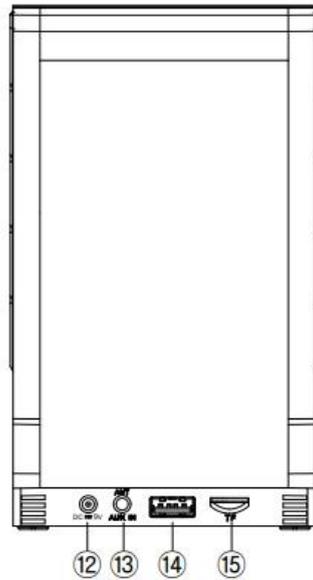
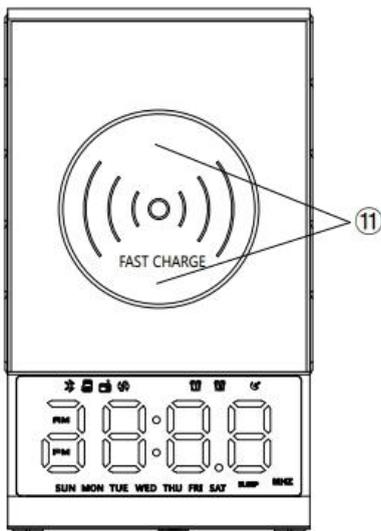


# User Manual for Digital Alarm Clock Radio with Bluetooth Speaker & Wireless Charger

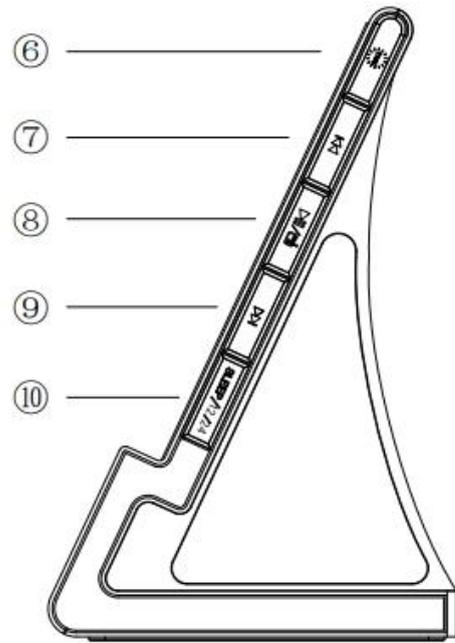

## **Specifications**

- Plug: EU
- Power: USB
- Input: AC 100-240V / 50-60Hz
- Output: 9V / 2A
- Connection distance: within 10 meters
- Bluetooth: 5.0
- Interface: USB
- Working time: up to 8h
- Speaker power: 5W x 2
- Product size: 9,1 x 10,1 x 16cm (L x W x H)

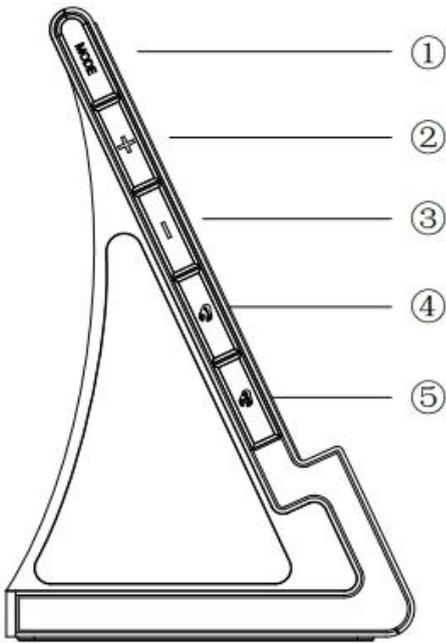

- 1. Mode select
- 2. Volume Up
- 3. Volume Down
- 4. Turning Alarm 1 On/Off
- 5. Turning Alarm 2 On/Off
- 6. Screen Brightness
- 7. Last sound played
- 8. Pause


- 9. Next sound
- 10. 12/24 time switch
- 11. Wireless charging rings
- 12. 9V DC power port
- 13. 3.5mm AUX port
- 14. USB port
- 15. TF/MicroSD card slot
- 16. Battery slot

## Instructions

Plug the power adapter on the backside of the alarm clock. Short press the Mode button to turn it on and long press to turn it off.

To choose between Bluetooth, TF/MicroSD memory card, radio, or AUX input, simply tap the Mode button and select the desired input type.

To charge your device wirelessly, first of all, your device must support wireless charging. If it does support, then simply place it on the wireless charging rings either vertically or horizontally.

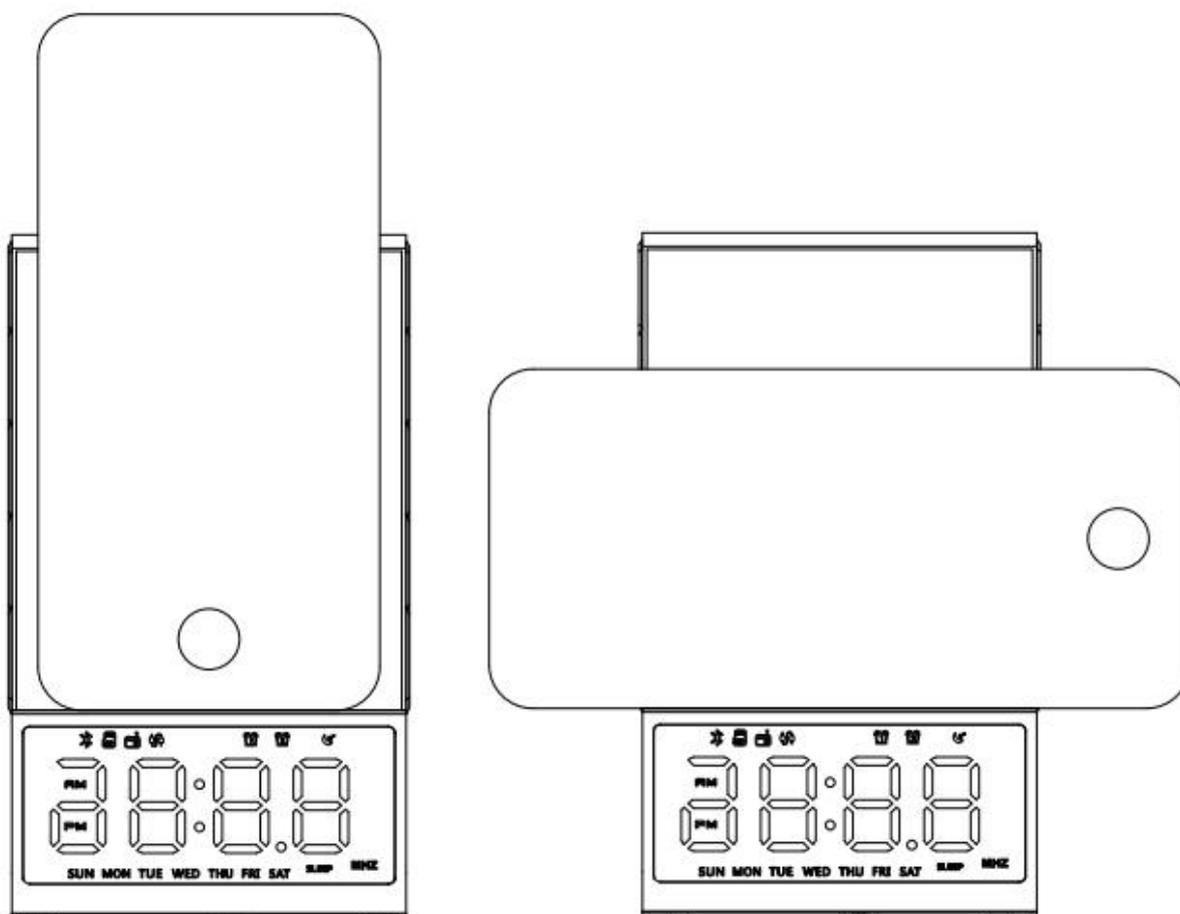

To set the alarm long-press the Alarm 1 button. Once the Hours start flashing, adjust it using the +/- buttons. Press the Alarm 1 button to change to minutes and set it using the +/- buttons again. After that tap Alarm 1 to jump to the Sound settings and it will start flashing. Here you can choose what sound you want to set to the alarm. Choose between sounds from the memory card or from the radio. When done, tap the Alarm 1 button, and the Day setting will start flashing. Set the days when you want the alarm to wake you up and press the Alarm 1 button once. Next is the volume of the alarm which you can set using the +/- buttons. After that, short-press the Alarm 1 button and that's it. Alarm 1 is set.

To set the Alarm 2, do the same as for alarm 1, just keep pressing the Alarm 2 button instead.

If you don't stop the alarm manually once it starts ringing, it will keep ringing for 60 minutes. After that, the alarm will automatically turn off.

The alarm clock has a USB port that allows you to charge your device using your cable. Simply plug the USB end to the Alarm Clock and the other end into your device and it will start charging.

The bottom battery cover can be opened by turning it according to the arrow direction. But, be warned that the Alarm Clock can't operate normally using only the battery. It simply serves to power on the clock function of the device if there is no wired power to the Alarm Clock Radio. The battery needed is 3V CR2032 battery that is not included in the package.