

Wireless Smart RGB LED Ceiling Light for Home




Specifications

- Diameter: 12"
- Bluetooth connection
- Luminous flux: 1700lm

- Lighting efficiency: 80-100 lm/W
- Equivalent: 150W incandescent lamp
- White light: 20W
- RGB: R-2.5W, G-2.5W, B-2.5W
- Water-resistant rating: IP20
- Input voltage: AC 100-240V
- Working temperature: -20-40 degrees
- LED life: about 27.4 years (if works 5h per day)
- Brightness adjustment: 10-100%

Product information

1. Outlet box (not included)
2. Fixture pan
3. Diffuser
4. White supply wire
5. Black supply wire
6. House ground wire
7. Wire units
8. Fixture screw
9. White fixture wire
10. Black fixture wire
11. Fixture ground wire
12. Metal ring
13. Caps

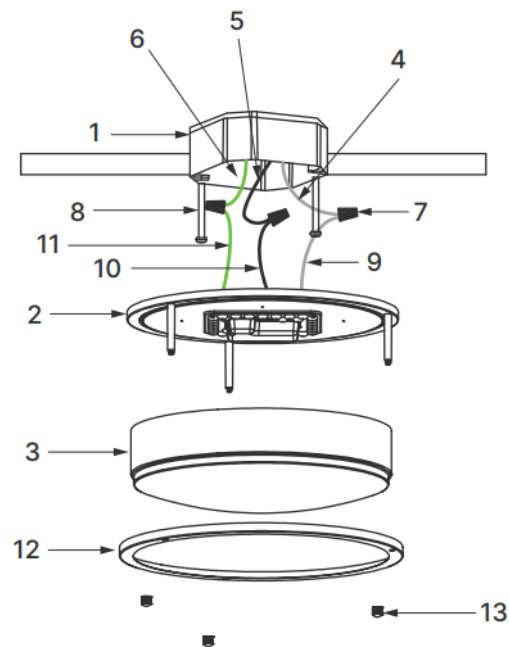

Installation

Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock. All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

1. Pull the supply wires (4 & 5) and house ground wire (6) out from the outlet box (1).
2. Thread the fixture screws (8) into the appropriate threaded holes of the outlet box (1).
3. Electrical connections connect the black fixture wire (10) to the black supply wire (5), the white fixture wire (9) to the white supply wire (4), and the fixture ground wire (11) to the house ground wire (6) using wire nuts (7).
4. Wrap all wire connections with electrical tape to ensure more secure connection and carefully tuck all wires back into the outlet box.
5. Place the fixture pan (2) over the outlet box and feed fixture screws (8) through keyhole slots. Rotate the fixture pan (2) clockwise until screws (8) slid into the narrow end of the keyhole slots and tighten firmly.
6. Final assembly- Secure the diffuser (3) and the metal ring (12) to fixture pan (2) using three cap nuts (13).
7. Installation complete, restore power at the circuit breaker and turn the light switch on to activate this fixture.

App Download & Pairing


1. Scan the following QR code to install "Smart Life" App, or download "Smart Life" from App Store, or Google Play to install it (Required OS: iOS 8.0+, Android 4.0+)



2. Open the "Smart Life" app and register your device.
3. Enter your phone number or email address and select the country you live in.
4. After inputting your phone number, you will receive a text with a registration code. But if you choose email, you will be asked to create a password.
5. Input the registration code you received or the password you create if you have chosen the email method.

Quick mode configuration (recommend)

1. Before connecting, please make sure that your smartphone or device has connected with your WiFi successfully and open the Bluetooth simultaneously.
2. Turn ON-OFF the smart ceiling light five times until it blinks rapidly (If the smart light blinks rapidly when the power is turned on, it means it is ready for configuration already).
3. Open the App and tap “Add Device” or the "+" sign.
4. Click on “Lighting” and select “Ceiling Light(Wi-Fi)”.
5. Choose your WiFi and enter your password.
6. Make sure the light flashes quickly and click "Next" to connect the light.
7. After the light is added, you can edit its name, choose its location, then click "Done".
8. Now, you can control the smart ceiling light through the "Smart Life" App.

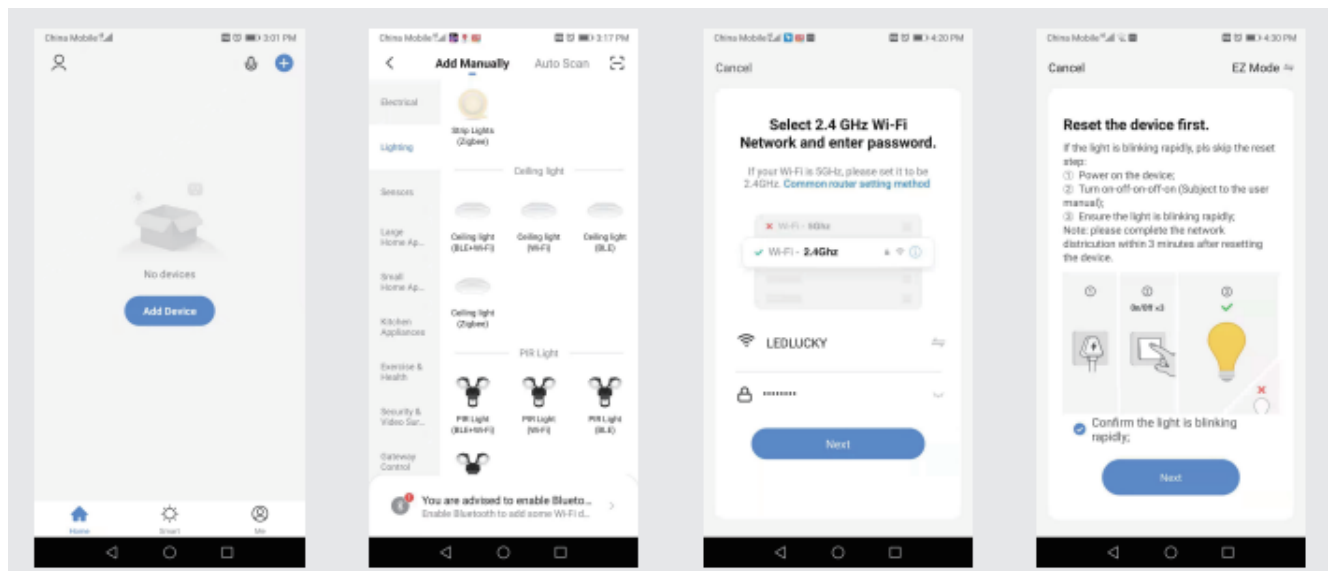

Operation

1. Click the smart light on the homepage to open the control panel.
2. Select "White" on the Control Panel to set the color temperature of the light.
3. Click "Color" on the Control Panel to set the color of the light.
4. Click "Scene" to set various scene modes and customize the lighting effect.
5. Click the "Switch" button at the bottom of the control panel to control the light on and off.
6. Click the "Timer" button to set the lighting effect of various time periods.
7. Click the "Schedule" button to set the schedule.

