


## User manual for NoiseHush N780 Over-The-Head Multipoint Bluetooth Headset



### Specifications

- Bluetooth: v2.1, CSRBlue Core 6
- Frequency: 2.4GHz
- Standby Time: up to 220 hours
- Talk Time: 13 hours
- Rechargeable Battery: Li-Polymer
- Working Range: about 10m
- Weight: 45g
- Size: 150mm x 140mm x 50mm

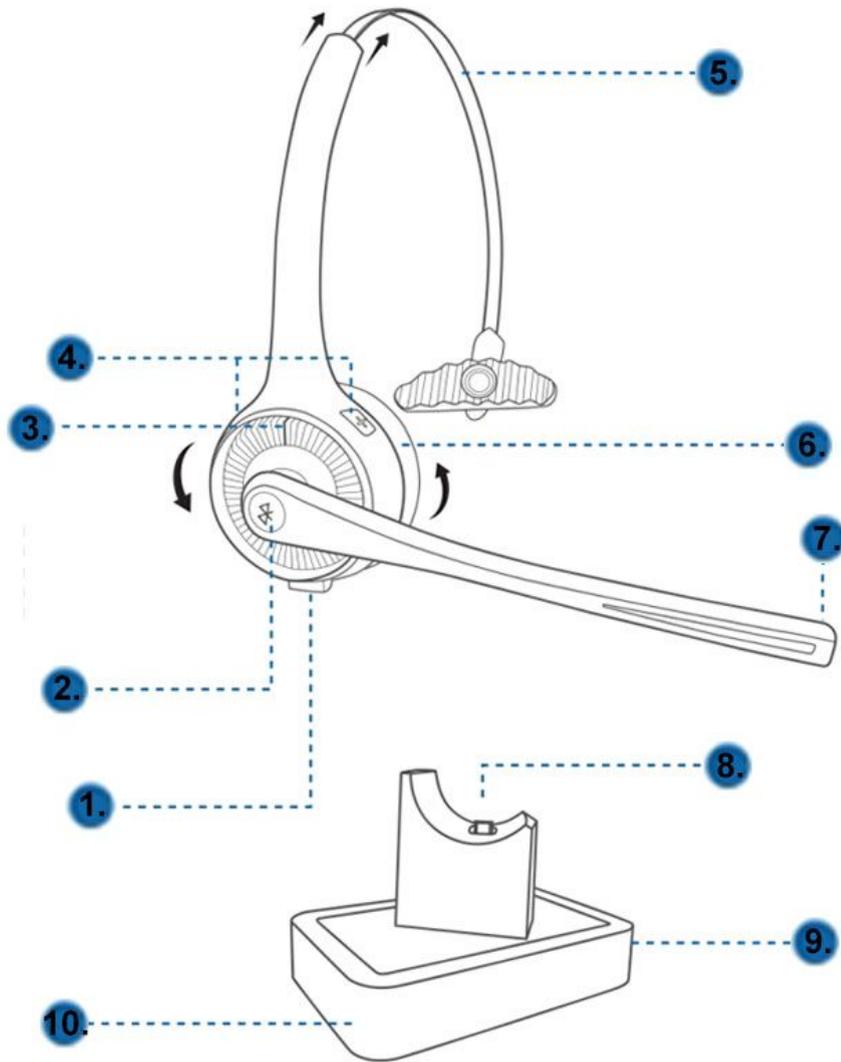

### Interface

1. Mini USB charging port
2. Multifunction button
3. LED indicator
4. Volume buttons
5. Adjustable headband
6. Ear cushion
7. Swivel microphone
8. Charging base
9. Mini USB power input
10. Charging dock

## **Charging the headset**

Please fully charge the headset for the first use to prolong the battery life.

To charge the headset, first, plug the included AC charger into a wall and then into the charging dock. Then simply place the headset on the charging port of the dock.

It's not necessary to charge the headset using the charging dock. You can also plug the charging adapter directly into the headset.

The LED indicator will light up red to show the charging process. When the charging is complete, the LED will turn off. When the red LED is flashing, that means the headset is low on power and needs to be recharged.

## **Pairing the headset**

First, make sure the headset is turned off. Then press and hold the Multifunction button until the LED begins to blink red and blue. Turn on the Bluetooth on your device and search for devices. Select the N780 from the list of found devices and confirm the Bluetooth connection.

If you need to enter the passcode, enter 0000.

To use the Multipoint capability and pair the second device, you have to turn the headset off. Also, turn the Bluetooth off on the first device. After that, pair the second device similar to the first.

To switch between the paired devices, you have to turn the Bluetooth on the paired device off and restart the headset. It will automatically pair with the other device.

## **Hands-free calls**

- To answer a call press the Multifunction button once during an incoming call
- To reject a call press and hold the Multifunction button for 2 or 3 seconds during an incoming call
- To hang up a call press the Multifunction button once during a call
- To activate voice command press and hold the Multifunction button for 2 seconds
- To redial last number press the Multifunction button twice
- To increase or decrease volume press the Volume + or Volume - buttons