


# Ultra-Thin Quiet Bluetooth Keyboard



## Bluetooth keyboard connection operation steps


1. To set the keyboard power button to “ON” position, the power indicator light will light up for 4 seconds, and then go out; Press the “Connect” to connect a keyboard key, Bluetooth connection will twinkle lights when Bluetooth is started, and can be connected to the tablet or computer.

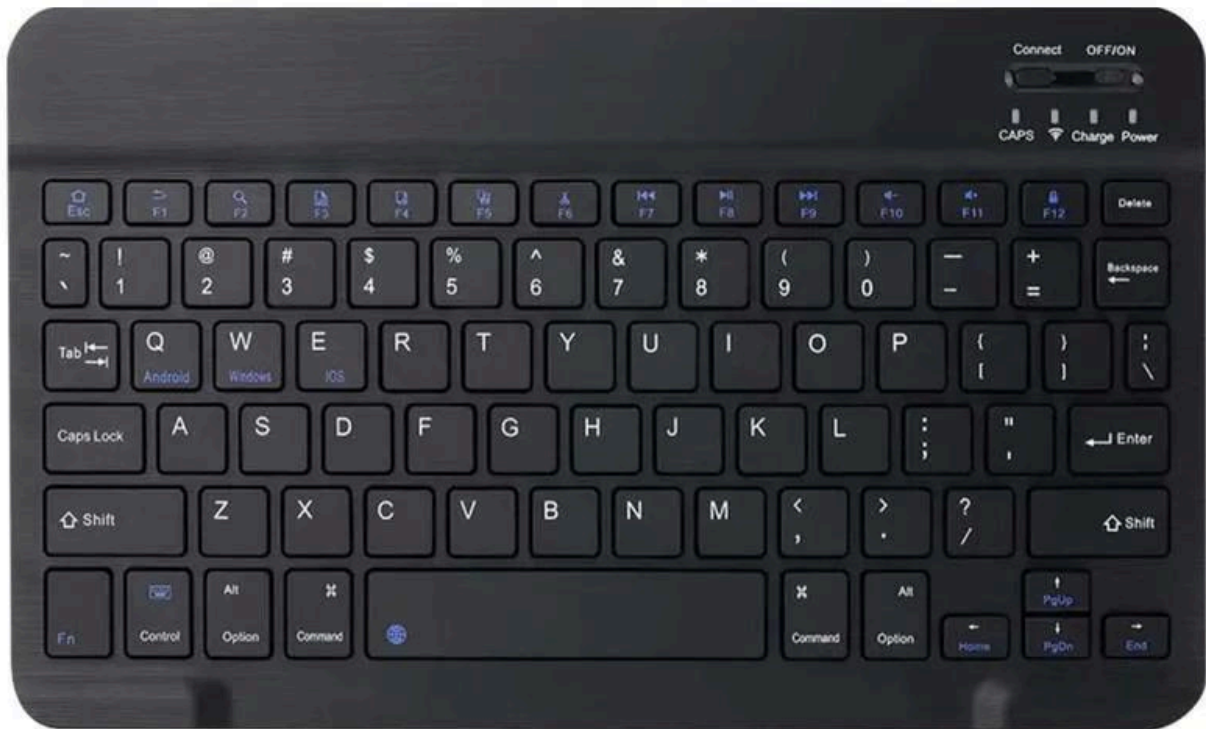


2. Open and unlock the tablet computer, click on the flat Board computer "Settings" icon.



3. Select “bluetooth” in “Settings” interface Enter the bluetooth Settings interface, click on the bluetooth Pass to open the connection.

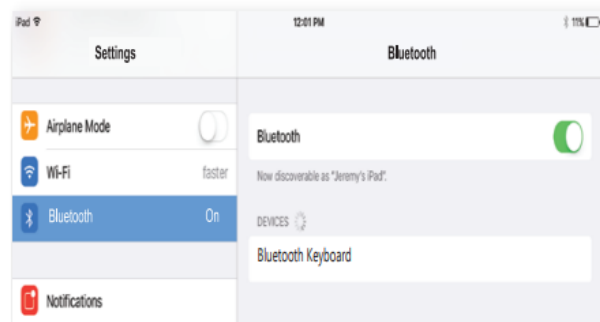

4. The tablet computer will automatically search for enabled Bluetooth devices, wireless keyboard found signals, Click the project link.

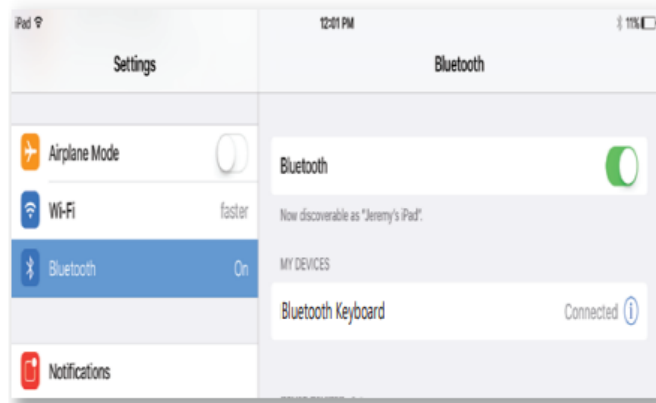

## Charging

When the battery is low, the power indicator light flashes, that means I need to charge the bluetooth keyboard.

1. Connect the B end of the original USB cable to the keyboard.
2. Connect the A end of the USB cable to the power adapter or A PC USB interface.
3. When the charging "Charge" indicator will light up, when the battery is full of "Charge" will automatically go out.

## Getting Started Guide

1. Button



Power toggle switch: slide switch ON or OFF to control the device power turn on or turn off.



Connect Button: Under the Power button turn on case, ready to be connected to iPad.

## 2. Indicator



Power indicator: Turn on the power toggle switch. The state indicator light will be on for 4 seconds, then the light will go off.



Bluetooth connect indicator: Press on the [connect] button, the [Bluetooth] indicator light will be blinking, indicator light will stay on until the keyboard connects with your device.



Uppercase and lowercase indicator: Indicator light will stay on under the uppercase.



Charging indicator: indicator light will be on when the keyboard will be charging by USB.

## Product specifications

1. Bluetooth 5.0 interface standard
2. Operating Distance to 10 meters
3. Modulation system: GFSK
4. Operation Voltage: 3.0-4.2V
5. Operation current: <2.5mA
6. Standby Current: <0.3mA
7. Sleeping Current: <40uA
8. Charging Current: >200mA
9. Standby Time : >100 days
10. Charging Time : 3-4 hours
11. Battery Capacity : 160mAh /400mAh
12. Uninterrupted Working Time: 100 hours
13. Lithium Battery Life : 3 years
14. Key Strength : 80+-10g
15. Key life : 5million strokes
16. Operating Temperature : -10-+55C