


# User Manual for Lemonda Smart BE1032 Waterproof TWS Earphones



## Specifications

- Screen: TFT 1,4", 240x240, touchscreen
- Connection: Bluetooth 5.0
- Battery capacity: 160mAh
- Battery life up to 10 days
- Charging time: 2h
- Waterproof rating: IP68
- Supported OS: Android 5.1 and above, iOS 10.0 and above
- Dimensions: 35 x 44 x 11 mm
- Wrist circumference: 130mm - 190mm
- Strap length: 220mm
- Weight: 33g

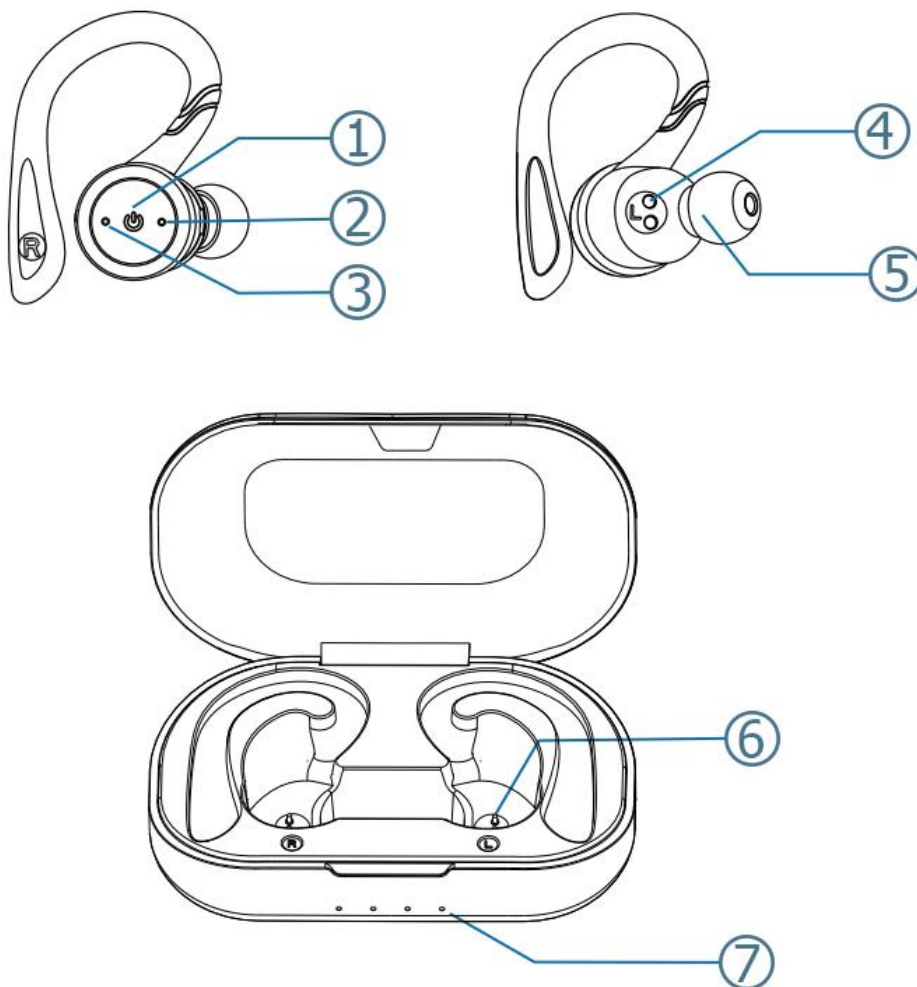

1. Multifunction button
2. LED indicator
3. Microphone
4. Charging pins

5. Ear caps
6. Charging pins
7. Indicator lights

## **Pairing**

Before the first use, take out the earbuds from the charging case and remove the stickers from the charging pins. Put them back to the charging case and take them out once the indicator lights start. The earbuds will automatically power on and enter the pairing mode. Open the Bluetooth settings on your smartphone, search for new device and select BE1032 to complete pairing.

## **Operations**

To Play/Pause the song short press the Multifunction button on left or right earbud.

To play the previous song double-tap the Multifunction button on the left earbud.

To play the next song double-tap the Multifunction button on the right earbud.

To answer or end a phone call short press the Multifunction button on left or right earbud.

To reject the phone call double press the Multifunction button on left or right earbud.

To increase the volume press and hold the left earbud. To decrease the volume press and hold the right volume.

The indicator lights on the charging case also indicates how much the earbuds are charged. So if 1 dot is lit the earbuds are 1%-25% charged, if 2 dots are lit they are charged 25%-50%, 3 dots means 50%-75%, and if all 4 dots are lit the earbuds are charged between 75% and 100%.